

Venus III-T



**Automatic roll
changeover**



**Tenzomat III
tension control**



Sophisticated options

This top class slitter rewinder is designed for multi-slit and mid-range roll diameter jobs with automatic roll and new core changeover. Offering high value in use, option customizability, high operator comfort with a compact design.

Web width 1350/1600/1850 mm
53.1/63/72.8"

Min. web width 300 mm
11.8"

Min. slit width 35 mm/25 mm option
1.4/1" option

Speed 800 m/min
2625 fpm

Processed materials PP, PET, LDPE, HDPE, laminate, paper

Unwind roll diameter 1300/1500 mm
51.2/59"

Unwind roll weight 1500/2000 kg
3307/4409 lbs

Rewind roll diameter 635 mm
25"

Core diameter 76.2/152.4 mm
3/6"



Automatic laser core guiding 08



Overhead web path 22



Automatic knife/blade positioning system 13



Unwinding tension control 21



Unloading system 09




Shaft-less unwind 18



Automatic cross slitting 24



Splicing table (more options) 14

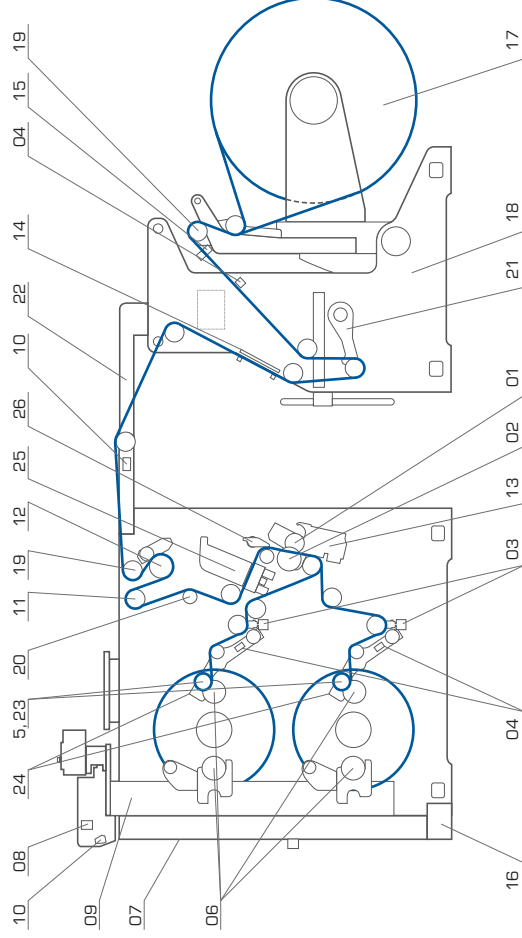

- 01 Male knife shaft
- 02 Female knife shaft
- 03 Strip holders
- 04 Ionisation bars
- 05 Lay-on rollers
- 06 Finished reels
- 07 Main control panel (Touch screen)
- 08 Laser core guiding (Optional)
- 09 Unloading system (Optional)
- 10 Working area lighting
- 11 Tensometric roller
- 12 Main drive roller
- 13 Knife positioning system (Optional)
- 14 Splicing table (Optional)
- 15 Web guiding system sensor
- 16 Laser scanner
- 17 Parent roll
- 18 Shaft-less unwind
- 19 Adjustable rollers
- 20 Spreader banana roller
- 21 Dancer roller
- 22 Overhead web path
- 23 Minimum gap winding (Optional)
- 24 Cross slitting
- 25 Automatic tape application unit (Optional)
- 26 Simple additional razor blade slitting (Optional)

